

CORPORATE OFFICE:

702, Iscon Elegance, S.G. Highway, Ahmedabad 380 015, Gujarat, India. Ph.: +91 90999 05252 / 05353 | Fax: +91 79 6616 8989

DISPLAY SHOWROOM:

107 - 108, Oreva Land Mark, Nr. Shiv Ajanta Hotel, Morbi 363 646, Gujarat, India Ph.: +91 90999 88251

MANUFACTURING UNIT:

Surendranagar - Rajkot highway, Opp. Jasapar Bus Stop, Nr. Muli Village 363 510, Gujarat, India. Ph.: +91 2756 233 185, 90999 93848

Email: info@soltiles.in Web: www.soltiles.in



DIGITAL GVT 1200x600mm | 600x600mm

An Innovated technology rediscovered




what is a 4K?

One higher level of clearer printing quality that is the next step after ultra high definition printing quality is 4K technology printing. Manufactured in high resolution pixels of 4000, this technology has been introduced by 'Sol Tiles' with the monopoly in the field as the most modern era product for sharper and clearer printing on tiles with real, natural and micro fine details.

Our R&D department has dedicately worked upon the printing quality to set up the highest level in printing by inventing the newer and better standards than the highest standard available in the market today. Its sincere efforts have competently retreated today's tiles world with profound quality of printing. We are skillfully launching the three premium ranges in tiles with 4K printing named Super Crystal, Sugar Finish and 8mm Slims in two sizes of 600x600mm and 600x1200mm.

By launching the 4K printing technology 'Sol Tiles' has made its name worthily meaningful.












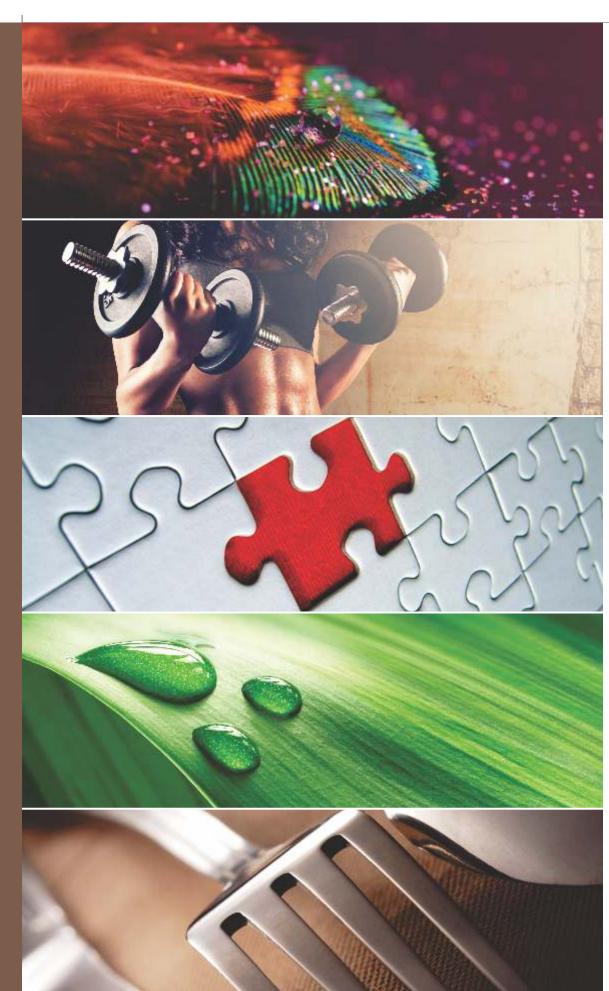



4K Digital

To impart the most accurate and aesthetically superior results to the tiles, SOL Tiles have adopted an all new 4K Digital Printing Technology. Bringing innovation to life for life like printing results on tiles, 4K Digital Printing technology is a revolutionary way to get more attractive and perfect effect on tiles.



ligh Strength

SOL Tiles promises beauty and elegance to your spaces for the lifetime as tiles of the portfolio comes with impeccable strength and toughness.



With envious portfolio comprising the widest range of designs, SOL offers solutions for every space and place. From regular size to biggest ever size SOL Tiles offers various size options to fit in to ever dream project.

Multiple Application



We believe in growing naturally and thus we put every practice in action to make sure nature's equilibrium is not disturbed. SOL is an environment conscious company and thus follows eco-friendly processes at every step.

SOL Tiles are made at state of the art manufacturing set up with stringent quality control



measures backed by extensive R & D ensuring products that keep the spaces cheerful and beautiful for the long time without any worry of maintenance.

Zero Maintenance



SOL Tiles – an offshoot of Parker Tiles was established to introduce novel ceramic tiling solutions in the industry. A company firmly established on the values of professional excellence, design quality and transparent functions, SOL Tiles has its soul set in heralding new tiling trends that suit the need of the industry with keeping comfort, practicability and space utilization in mind.

Bringing years of experience and expertise in to the practice and with smart amalgamation of creativity and technology, SOL Tiles churns collections that are always in vogue. More than tiles they are artistic representations that fulfill the designing desires of the customers. Products that take form after comprehensive R & D backed by stringent quality processes, tiling solutions from SOL Tiles can compete with international brands of Italy and Spain.

An eco-conscious company at the heart, the company takes great care in maintaining nature's equilibrium and adopts unpolluting practices. Also dedicated towards maintaining best relationship with both clients and employees, SOL Tiles work with highest integrity and transparency at every level.





Mission

We firmly believe in continual processes and product innovation to deliver the best of ceramic tiles with fine aesthetic qualities and durability. We have established innovation, integration and excellence as our fundamental principles; in other words, a dynamic geared towards continual improvement within the framework of sustainable growth.



Vision

Leveraging its vast accumulated experience, the company has set its sight on becoming an integrated provider of aesthetic and quality ceramic tiles to customers around the world. SOL believes in continues renewal to realize its mission of becoming the ceramic company of choice for customers worldwide. We strive to achieve a consolidated, sustained and independent growth on an international basis that ensures long- term business success. Our state-of-the-art ceramic tiles are the result of clear vision, backed by definite plans and confidence over out technically sound staff; thereby we are continually meliorating the position of our company and spreading luxury in people's lives.



Quality Policies

We constantly strive to achieve the highest possible standards in our day-to-day work and in the quality of the goods and services we provide through innovation technology and meaningful human resource development. It is through our high-standard quality management system; we assure that our customers get nothing but the best of our products and services.







Available in:

600 × 600mm

An exquisite collection to instantly grab the attention of one and all. It is a collection comprising exciting shades in aesthetically conceived designs with lovely textures.



MARS CHOCO



MARVEL BROWN



ARTICO GRIS




















PICASSO BEIGE

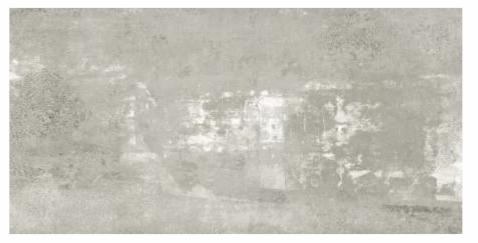

INOX GREY



ARCTICO GREY















Available in 600 x 600 MM



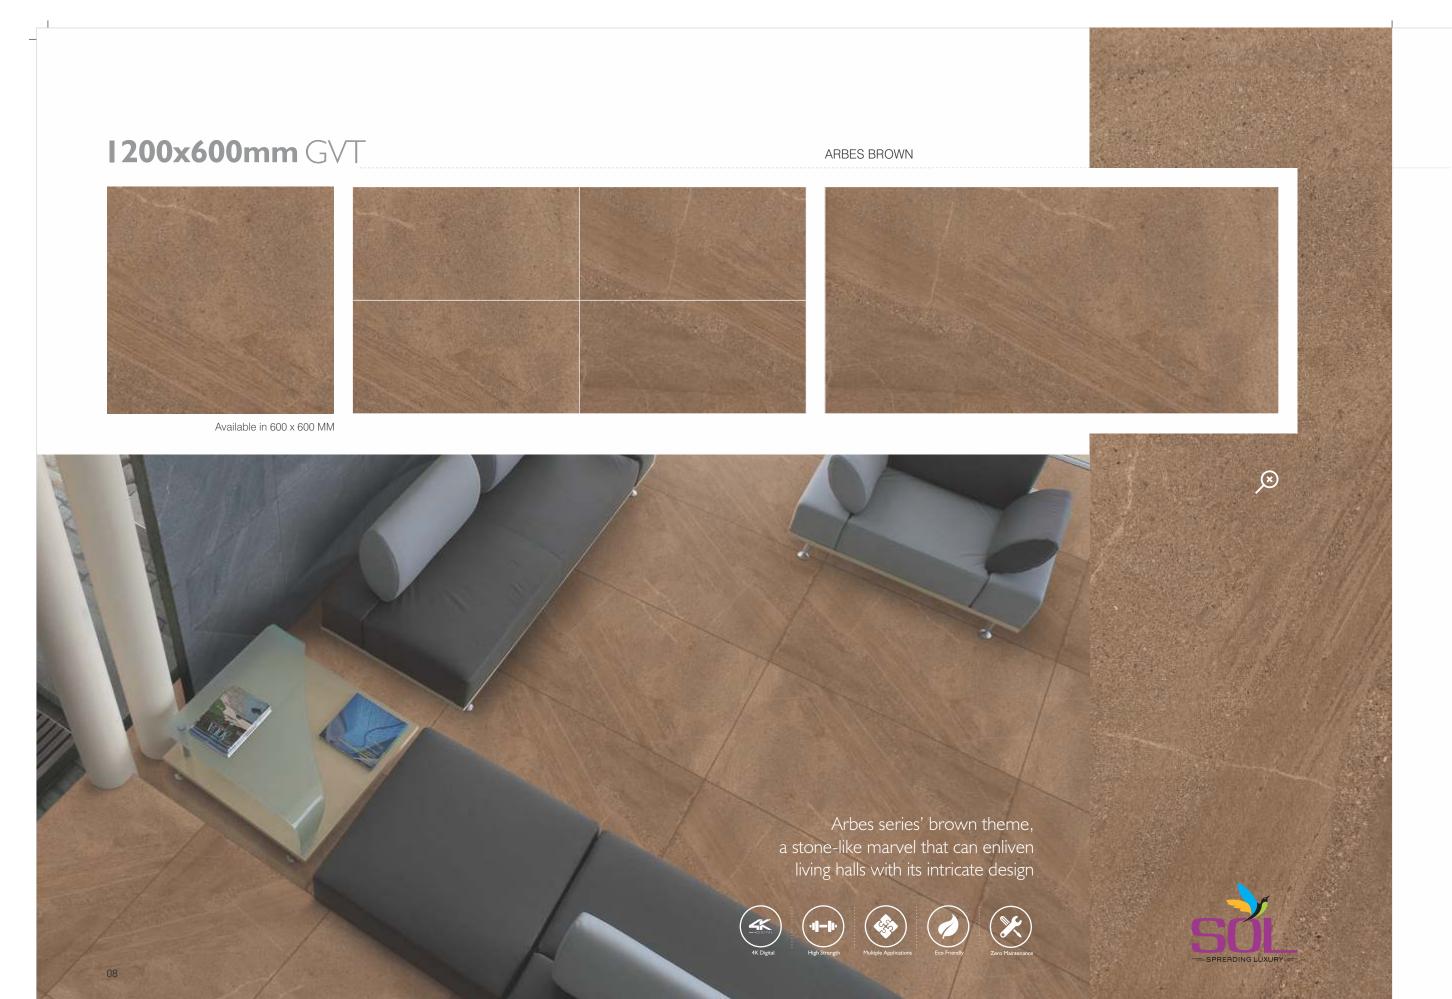



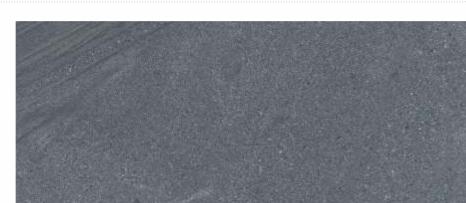

ARBES BLACK



ARBES GREY



HAMMER STONE BROWN







ARBES BEIGE



HARDOX GREY



HAMMER STONE BEIGE

09



CANVAS GREY



CANVAS ROSE



CEMENT COFFEE



















CANVAS PITCH



CANVAS BLOSSOM



CEMENT BEIGE DARK














Available in 600 x 600 MM

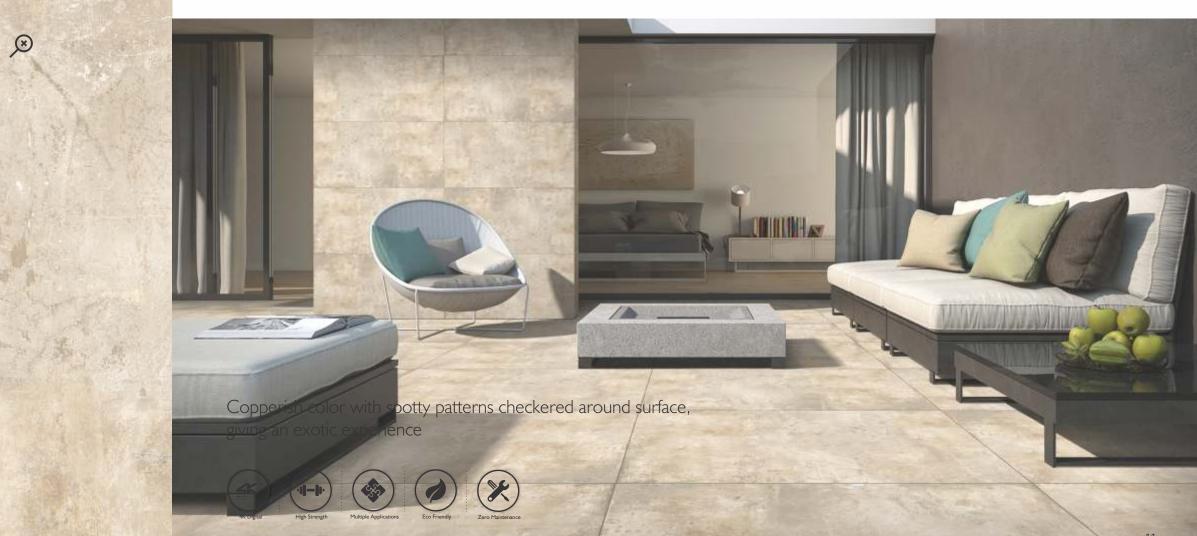

1200x600mm G√T






FLORITO BURN



Available in 600 x 600 MM

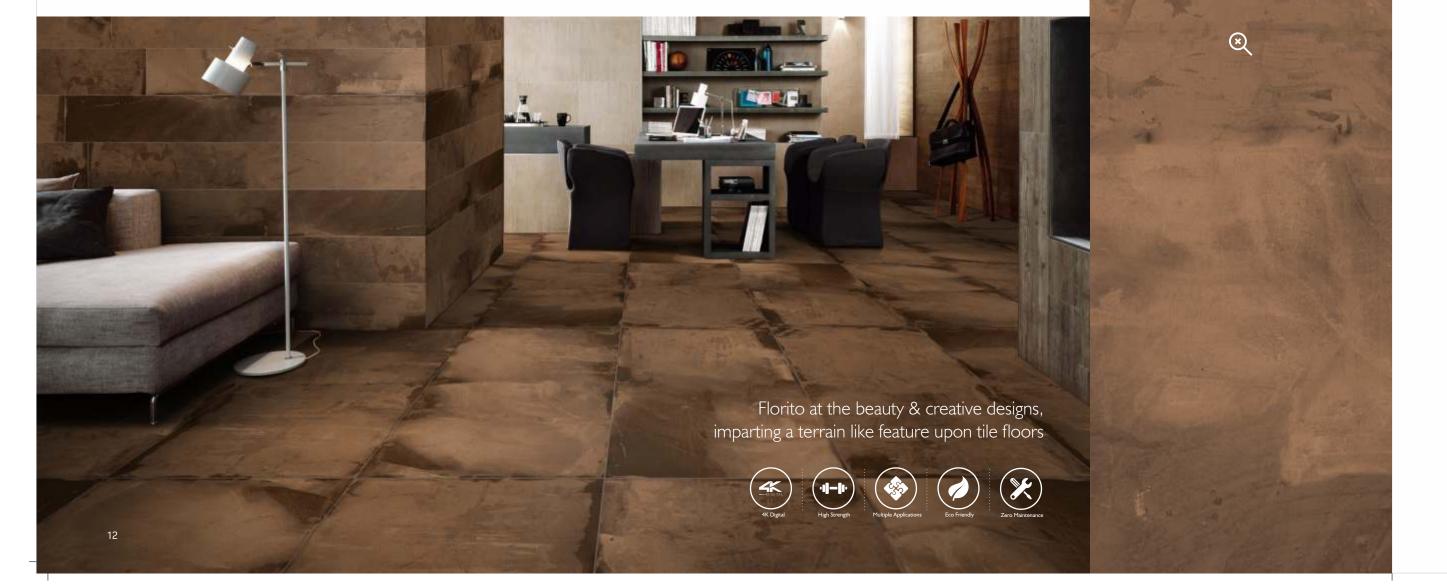














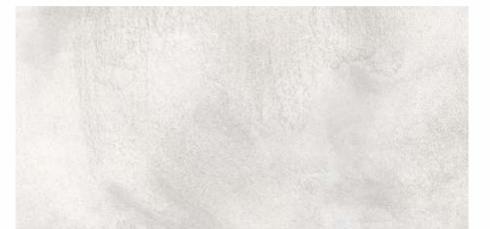





DUOMO BROWN



FLORITO BIANCO



DUOMO BEIGE



DUOMO BLACK



FLORITO GRAPHITE





























HARDOX AURO







HARDOX CROME





1200x600mm G√T







KRANE BROWN





















BALI BROWN




KRANE BIANCO



BALI BROWN DARK




KRANE BEIGE

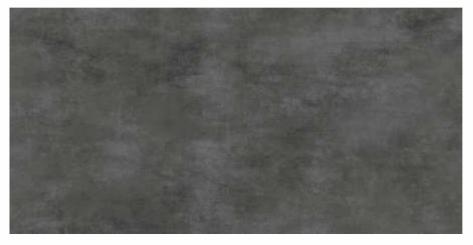

KRANE GRIS



ANKARA BIANCO

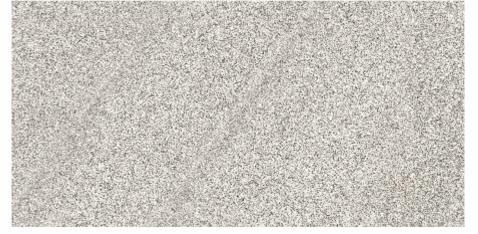

ANKARA GRIS



FALCUN BIANCO



ANKARA BROWN



FALCUN BEIGE



FALCUN GRIS
















Available in 600 x 600 MM

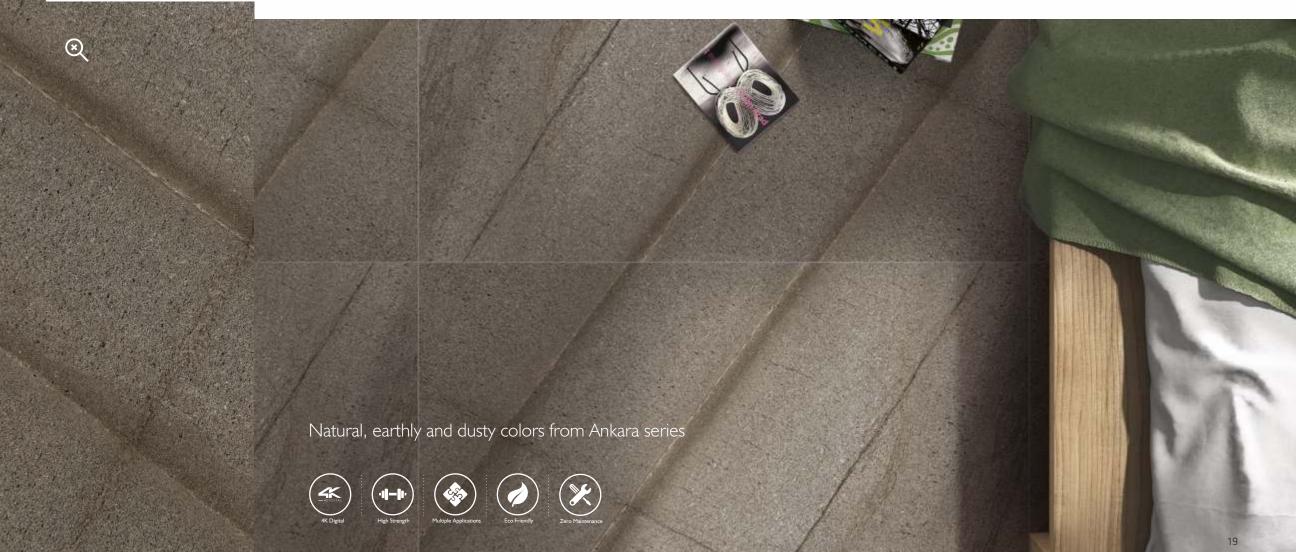



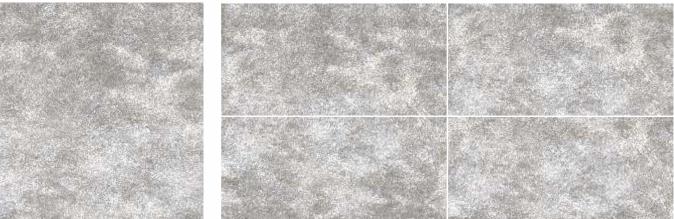





SILICA GREY





























SILICA BEIGE







SILICA BLACK



SILICA BROWN



BERYL WENGE

1200x600mm G√⊤



HOLI CREMA



HOLI BEIGE



MACAUVA BIANCO
















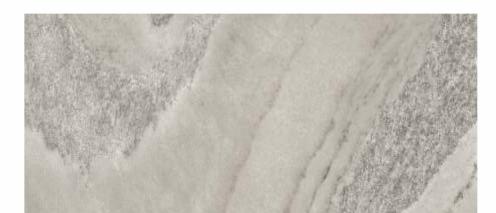

HOLI GRIS





MACAUVA GREY















Available in 600 x 600 MM

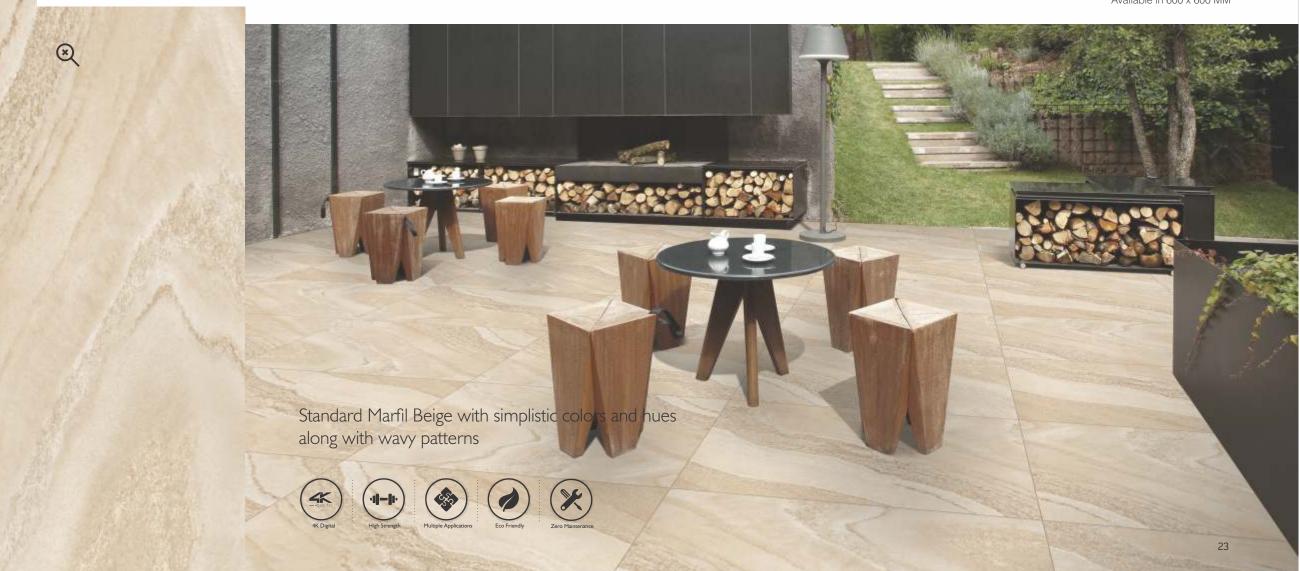


1200x600mm G√T





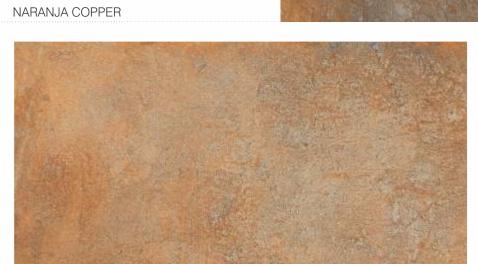

Available in 600 x 600 MM

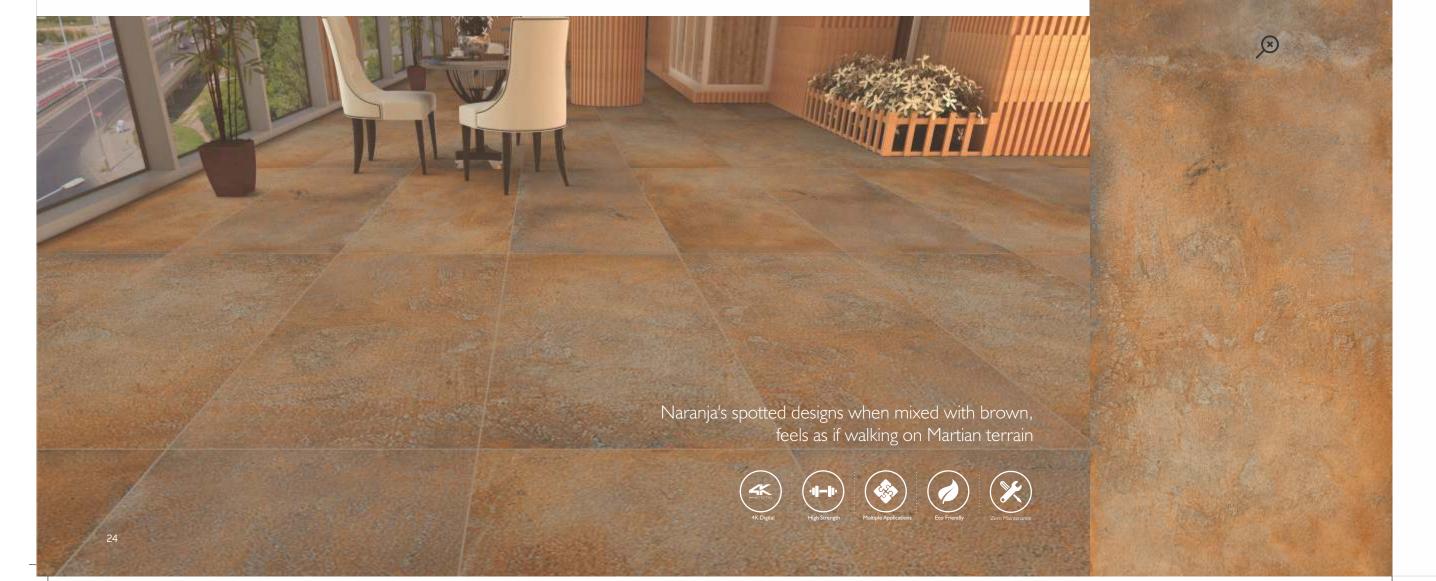





















NARANJA CREMA



NARANJA DUSKY



NARANJA MOCA



NARANJA ASH




HARDOX NATURAL



ARTEC BEIGE



ARTEC BIANCO

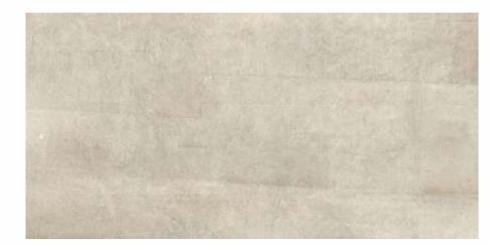

BERLIN BEIGE














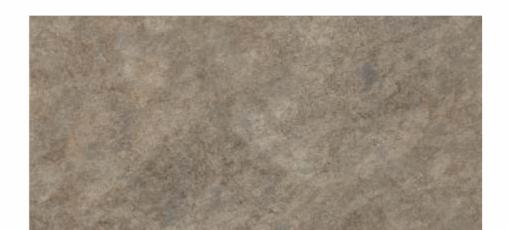

ARTEC COTTO



ARTEC GRIS



BERLIN IVORY














Available in 600 x 600 MM

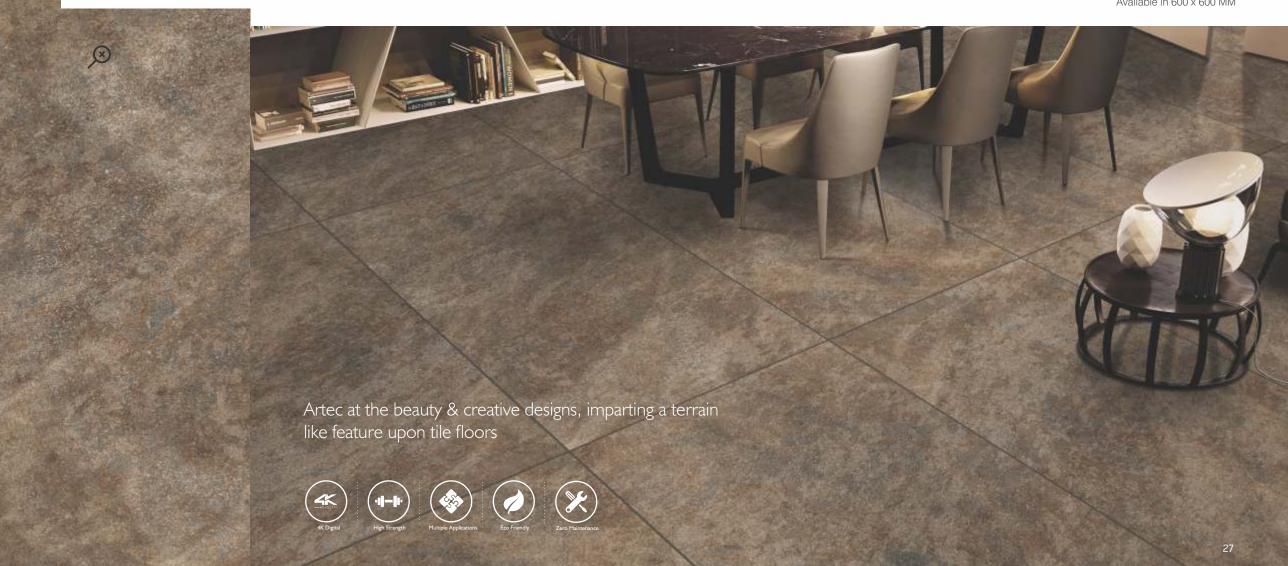







WOODEN

1200

Available in: 600 × 600mm

Style has its own mystic. An iconic collection that is specially nurtured and designed to bring in such an elegant finish to something called as simplicity.



BRUSELAS BIANCO



BRUSELAS BEIGE



CORAL BIANCO
















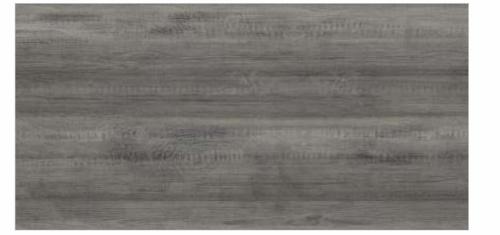

BRUSELAS BLACK





CORAL WENGE














Available in 600 x 600 MM

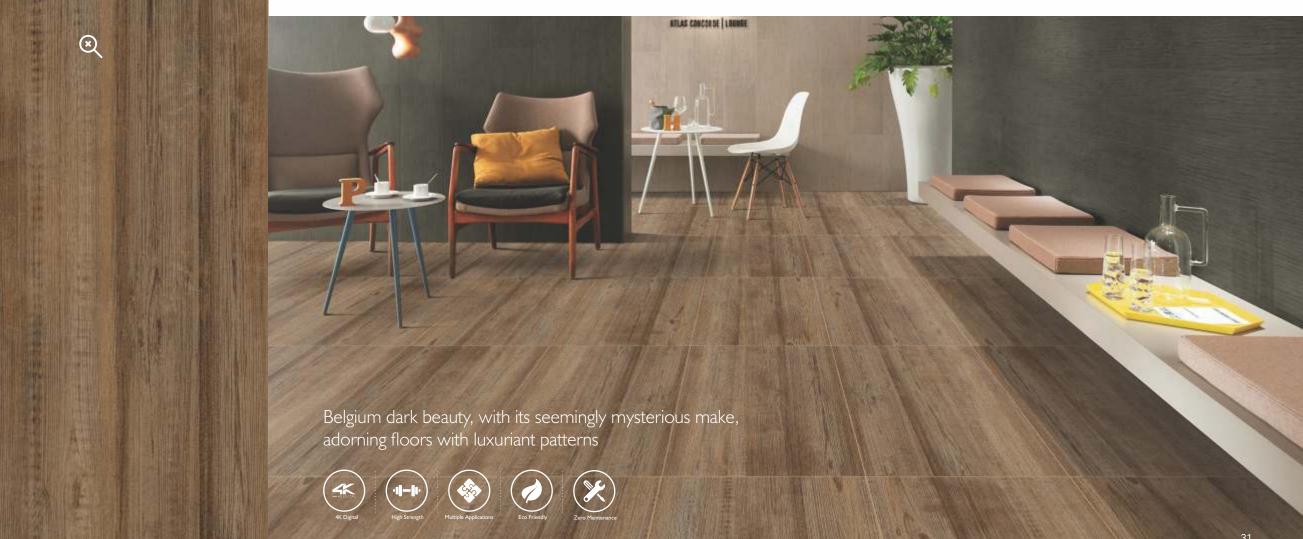










Available in 600 x 600 MM

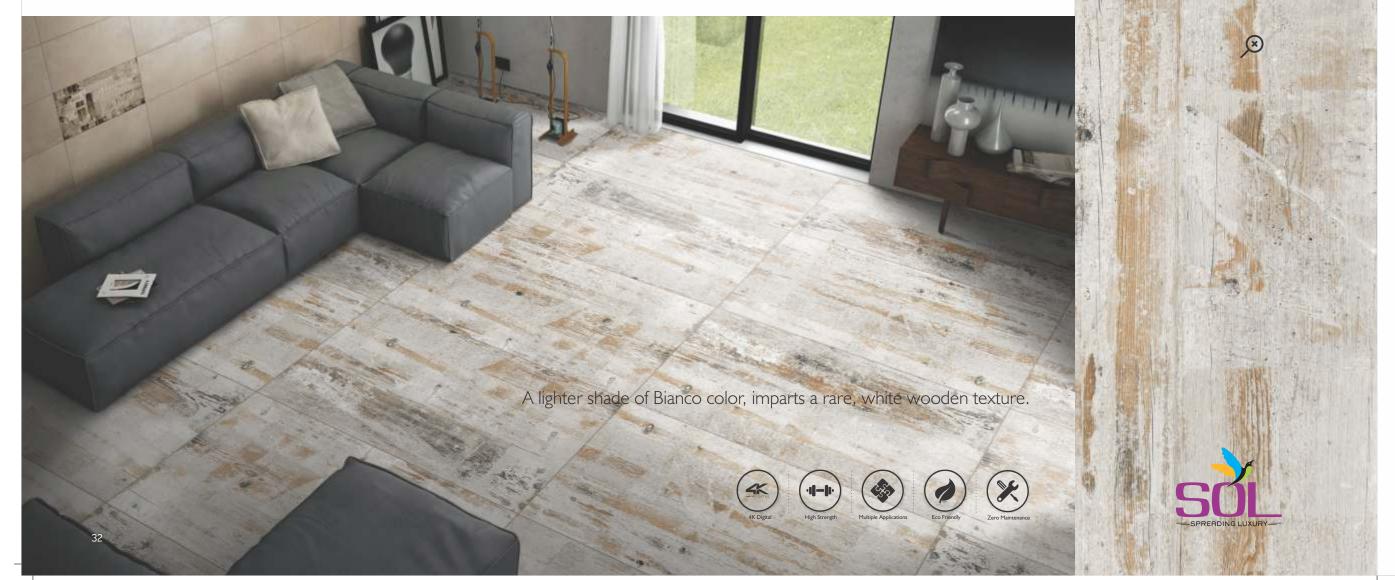
















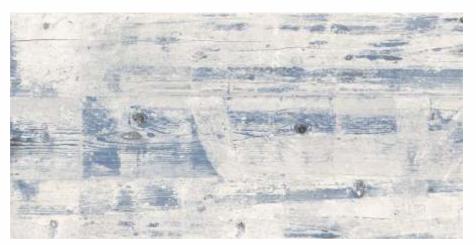



CORAL GREEN



NEPAL WOOD





MONTESA WOOD



BARNES WOOD



RIFT BEIGE



PEAR SAGE



ANACONDA WENGE















RIFT BROWN



PARAMO WOOD



ANACONDA DARK














Available in 600 x 600 MM

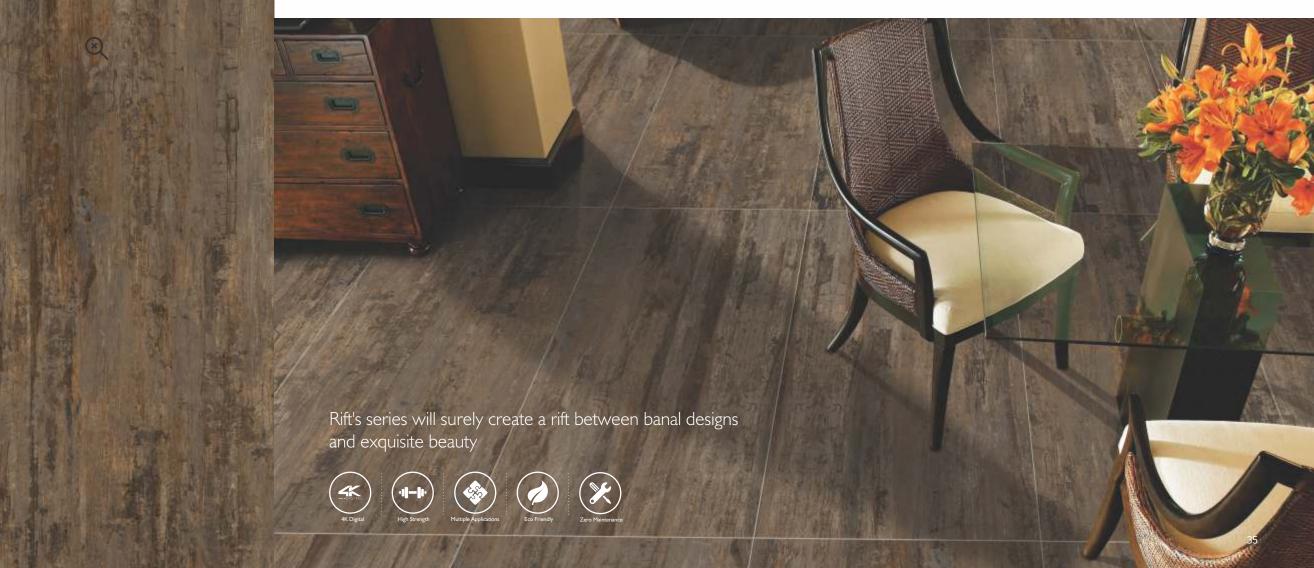












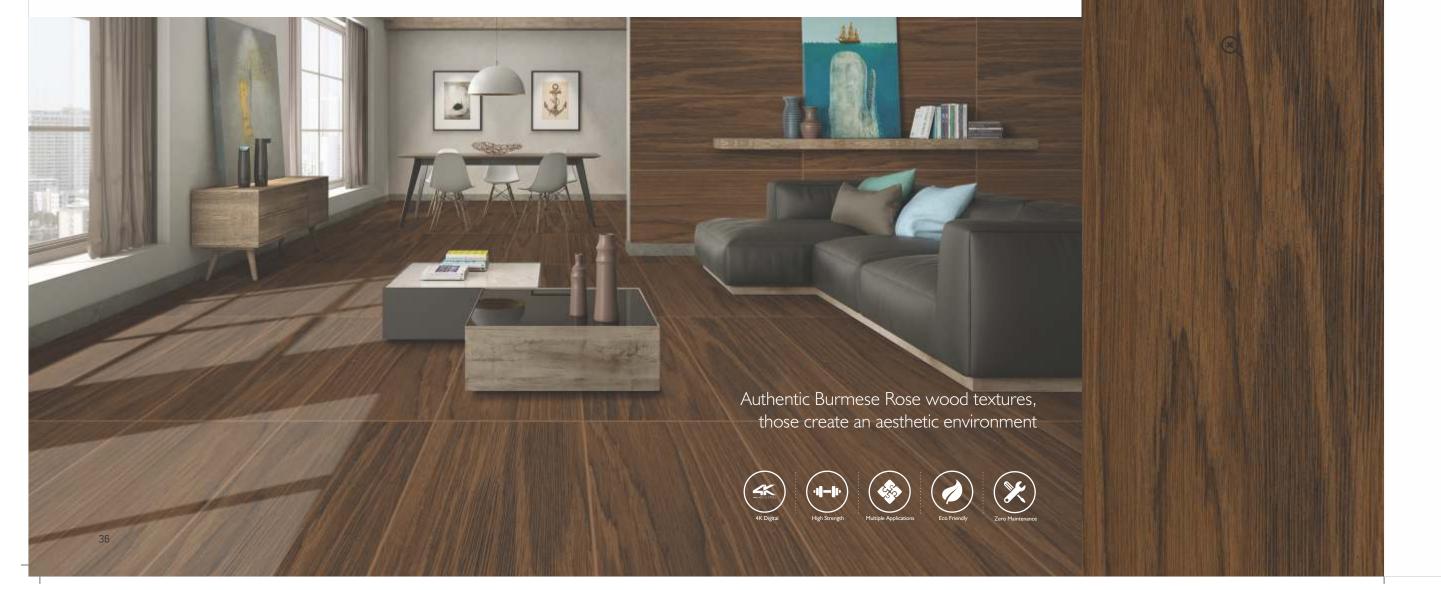





















CEDAR BEIGE



CEDAR WENGE



BURMA ROSE WOOD



CEDAR BROWN



PITCH STRIP WOOD

I 200x600mm WOODEN



NELLY TIMBER BEIGE



NELLY TIMBER GRIGIO



ETERNAL WOOD WENGE













PATCHWOOD ROSSO



NELLY TIMBER WENGE



ETERNAL WOOD BROWN














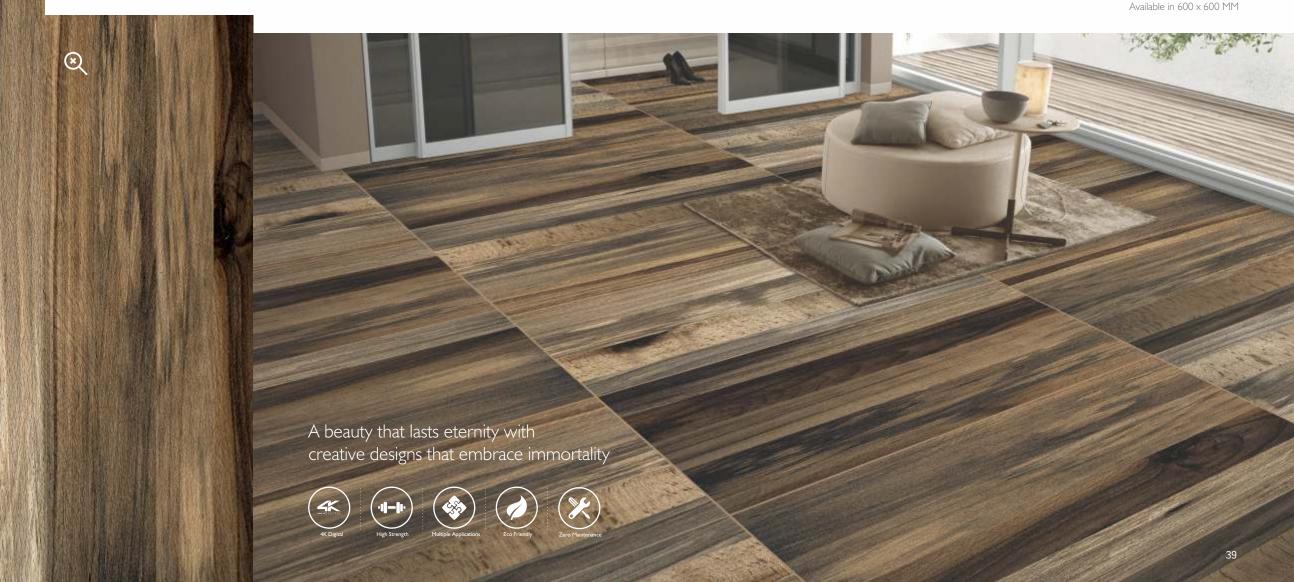

I200x600mm WOODEN





BIRCH BROWN

























LEXA BEIGE



CORDIA IVORY



BIRCH COFFEE



LEXA GRIS



CORDIA GREY







600X 600mm

Meet the fusion of verve & vigour. It is a collection where designs are classy, shades are superb and textures are instantly likeable with a promise of lifetime beauty.















ESSENZE



CHESTOR WALNUT



ANNEVRSA ALDER W



SHAYLYN TEAK



NATURAL WOOD



PINE BROWN










BANARUS STEEL



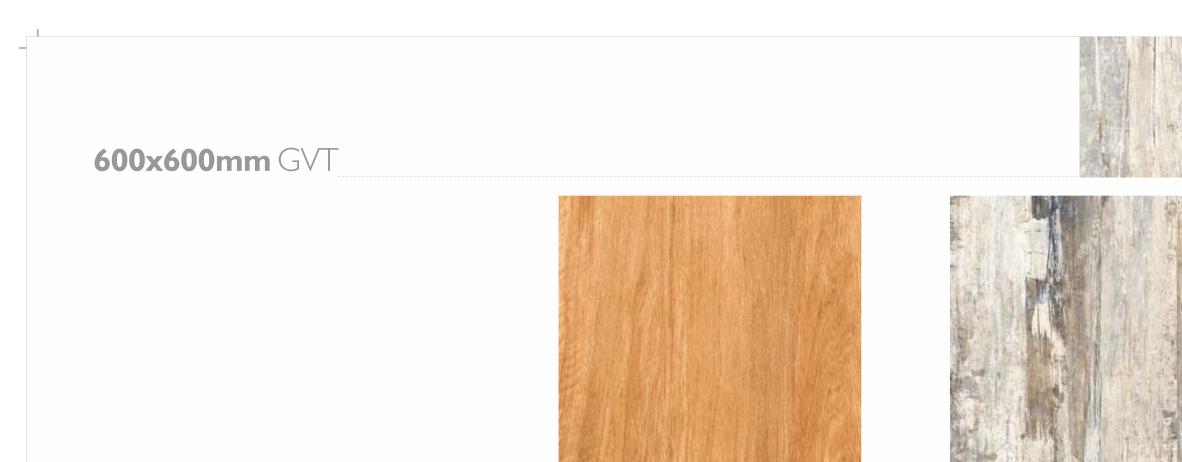





COTTO GREY

LISBON BEIGE
















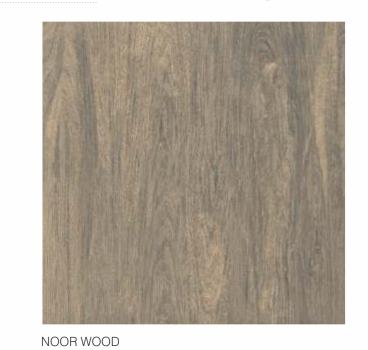







RALIQ ASH















VINTAGE GRAPHITO





ROXAN ROSE



CALDERA DUSKY



TALGO MAPLE












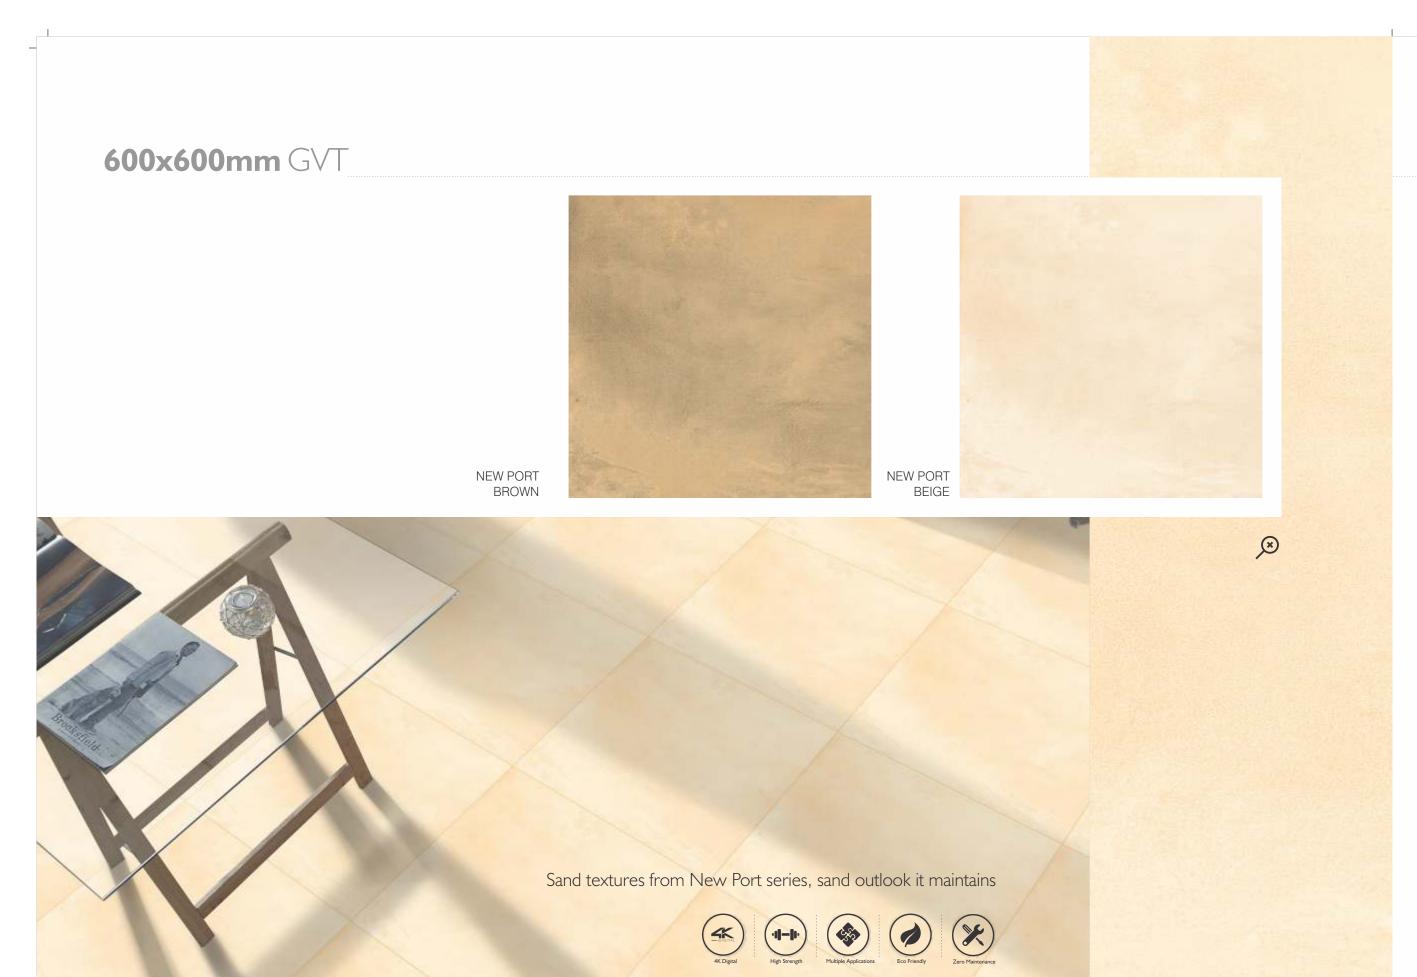













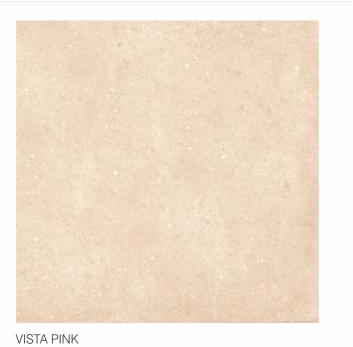







CEMENTO SAND





TIANNA PLATINUM








WOODEN STRIP

Available in: 1200x300mm 1200x200mm 600x300mm 600x200mm 600x150mm

Arboreal charm never loses its appeal even in the long passage of eons. An ever present beauty in the deep forests, it has now been gently plucked from its sparse habitations and applied with devotion & care to details upon SOL's wooden strips. A signature series is this masterpiece, replicating nature's pristine beauty

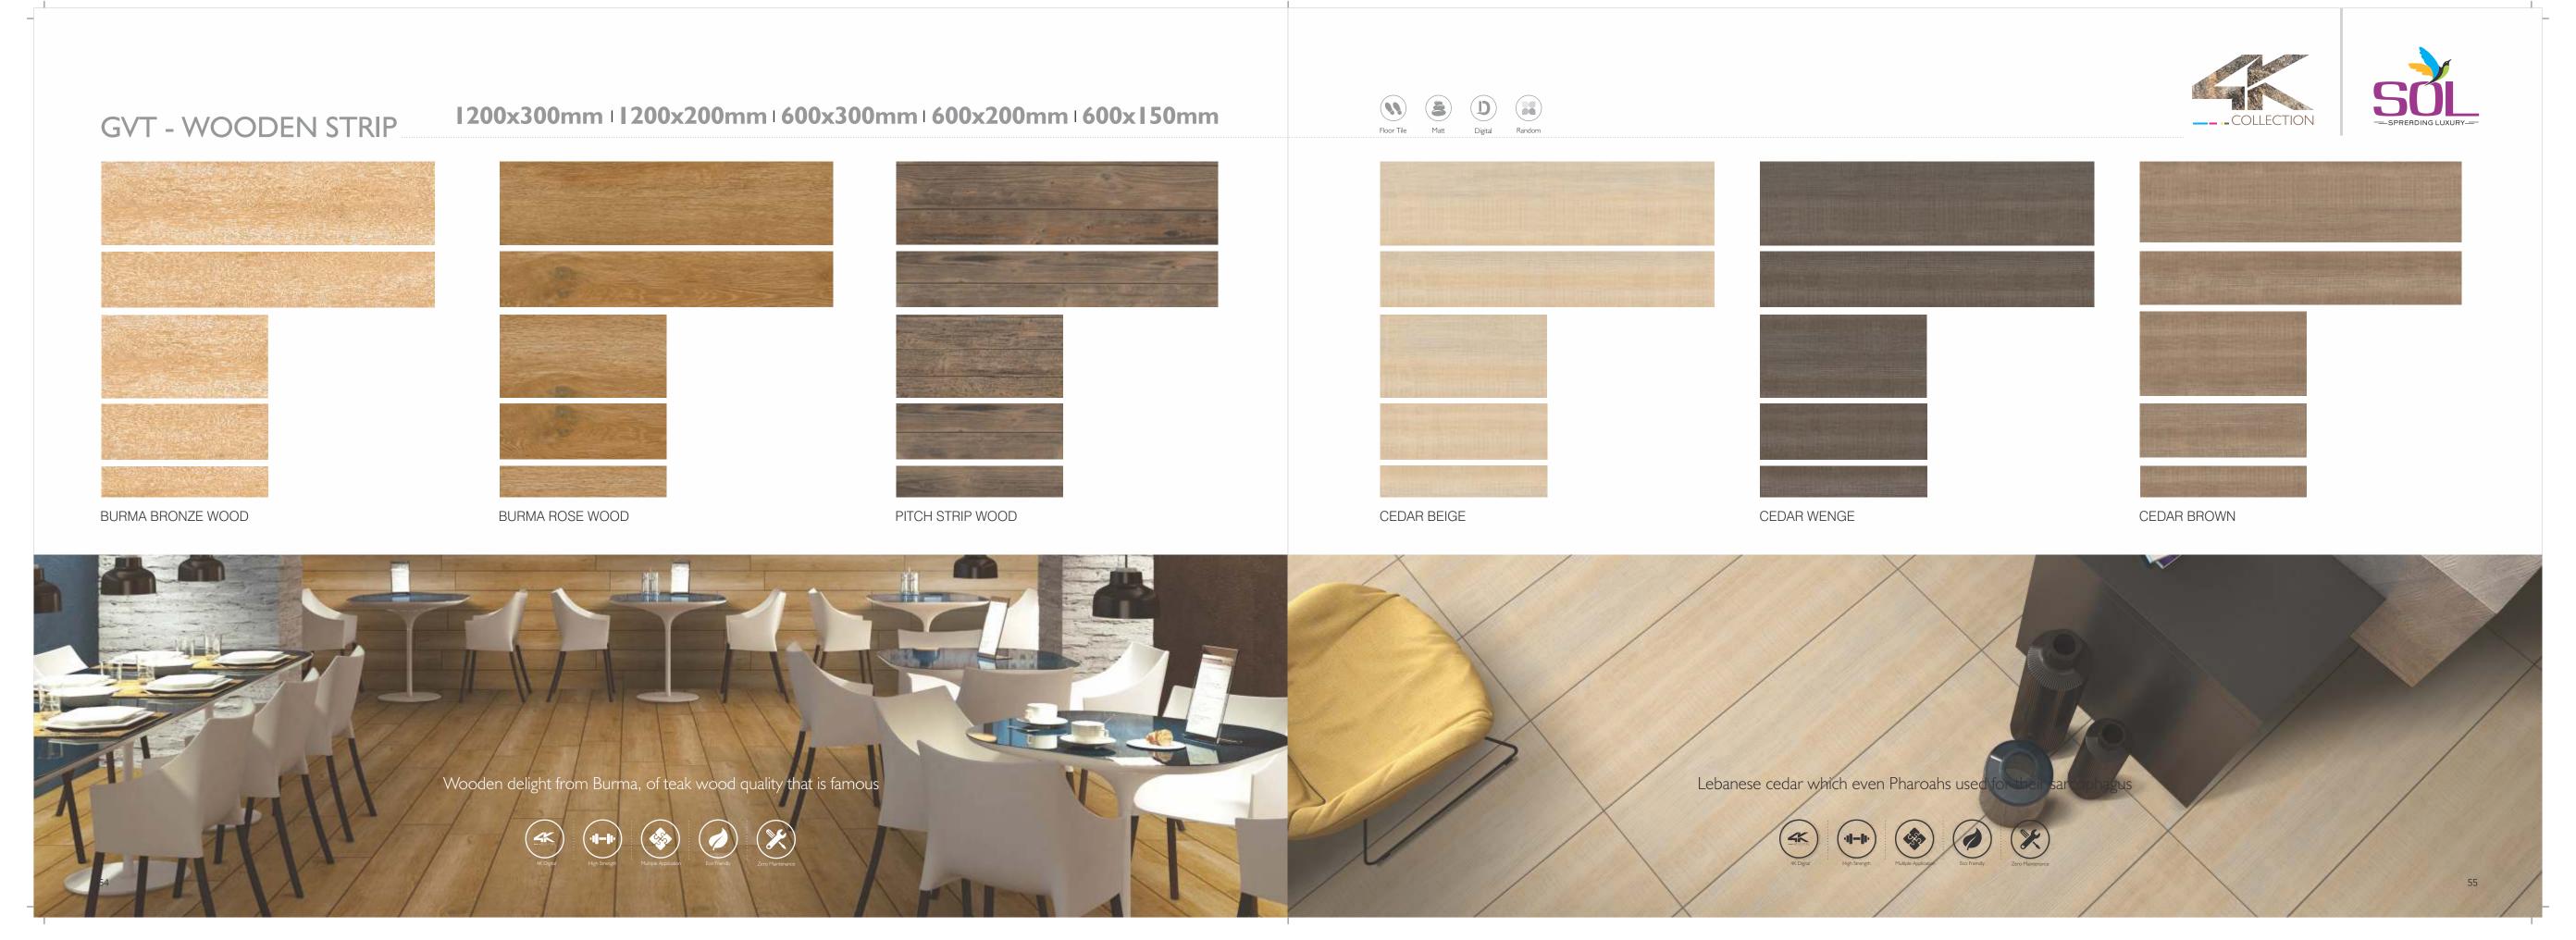

GVT - WOODEN STRIP

1200x300mm | 1200x200mm | 600x300mm | 600x200mm | 600x150mm





MICHIGAN WOOD BEIGE















MICHIGAN WOOD GREY





































ANACONDA DARK

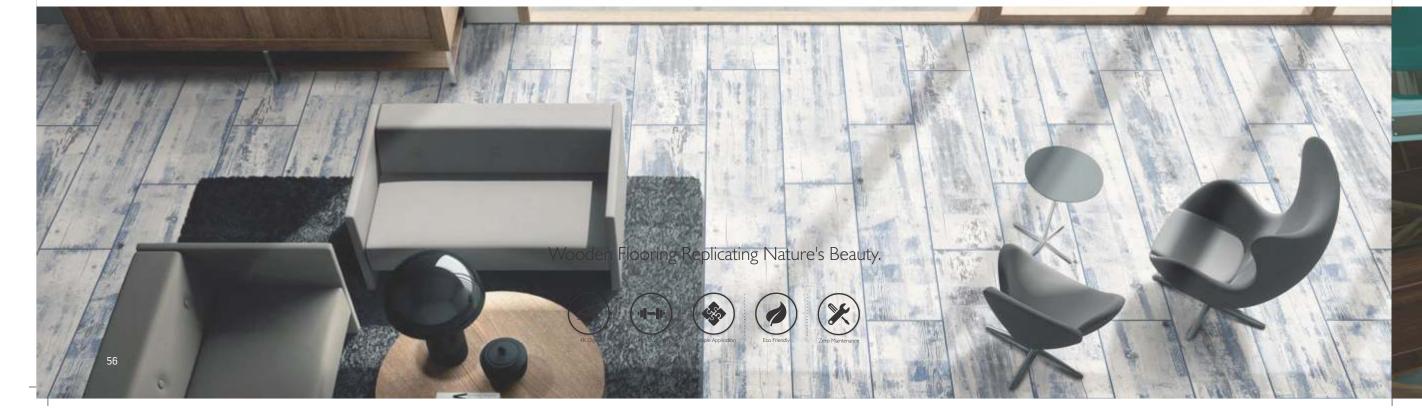



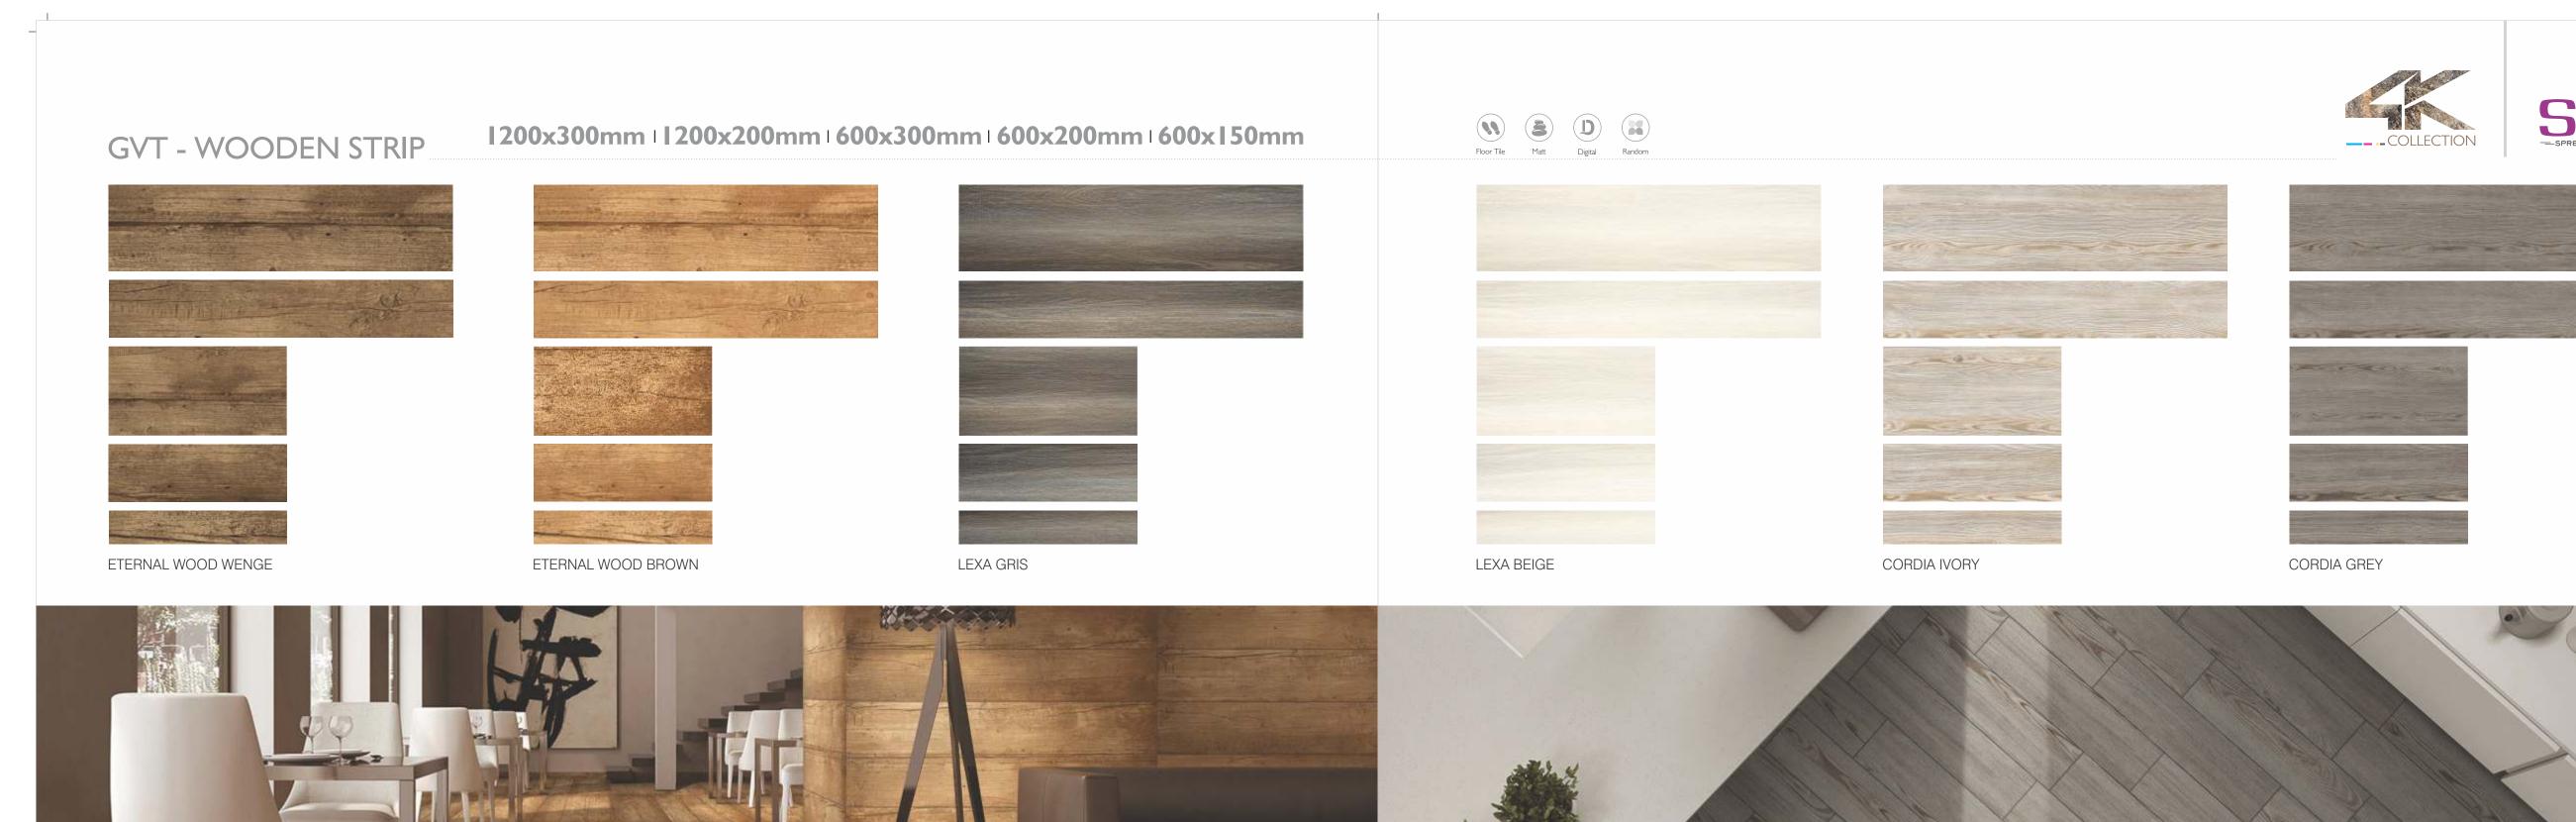

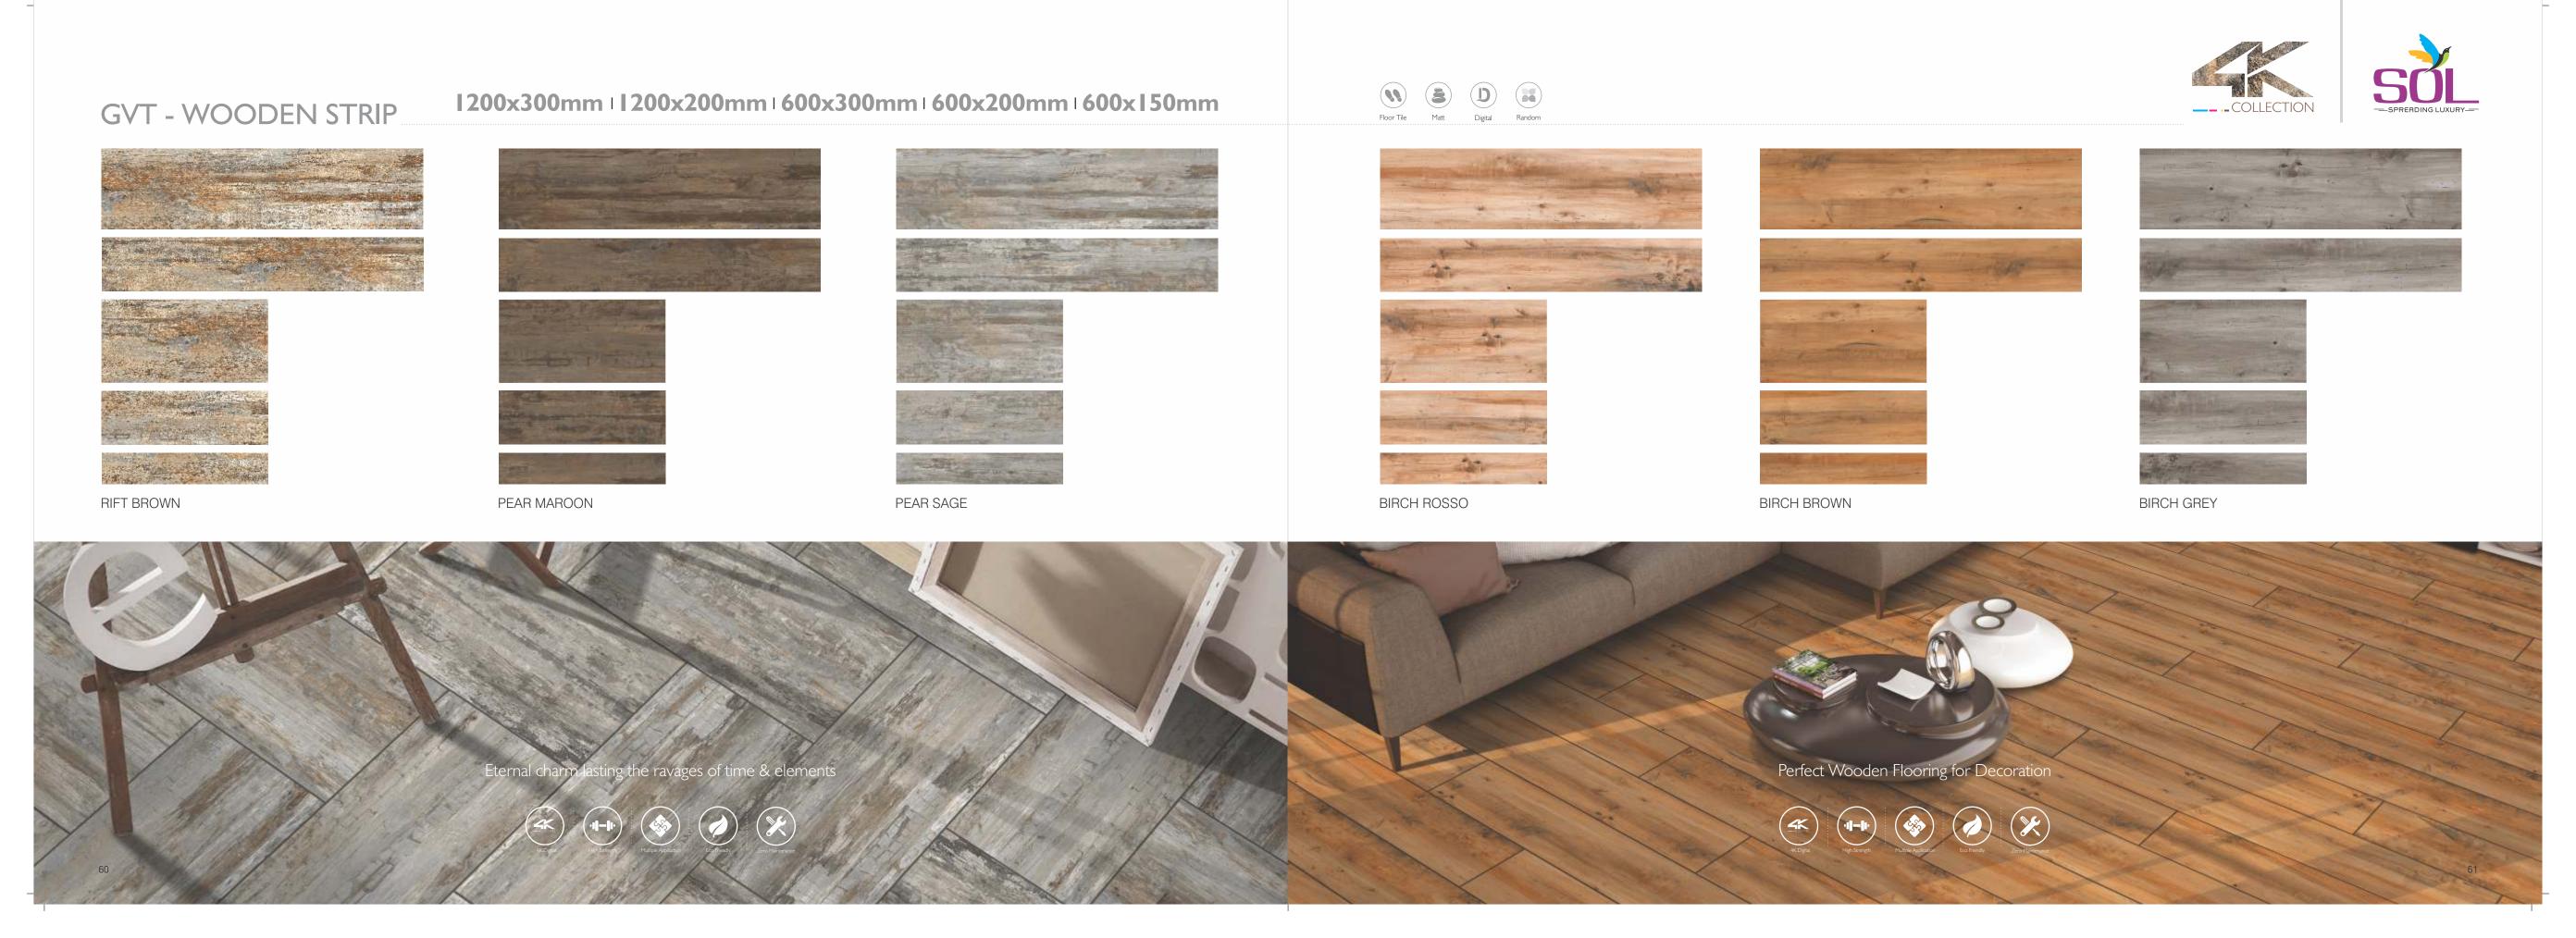

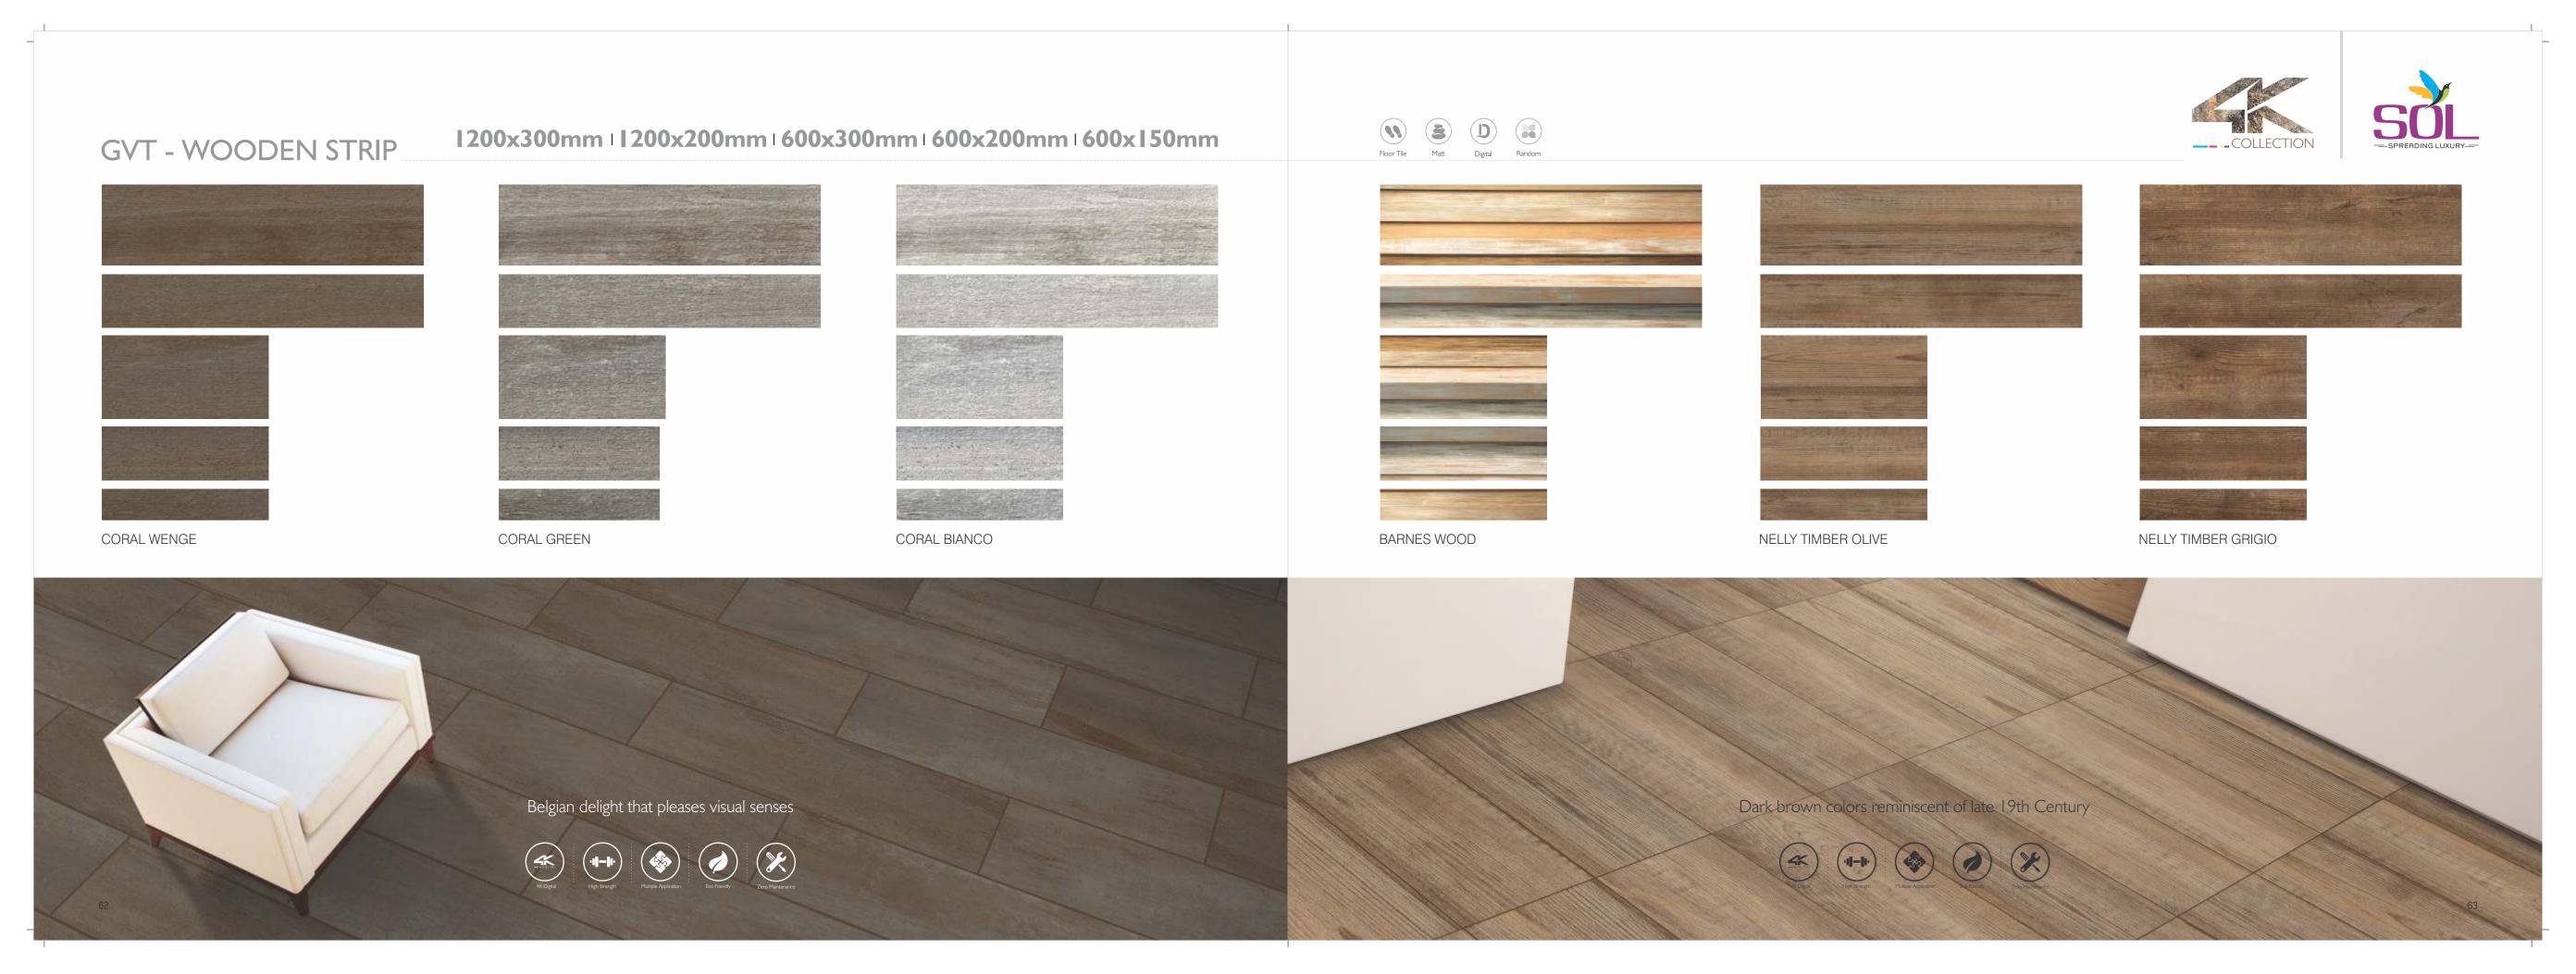



COUNTRY WOOD


1200x300mm | 1200x200mm | 600x300mm | 600x200mm | 600x150mm









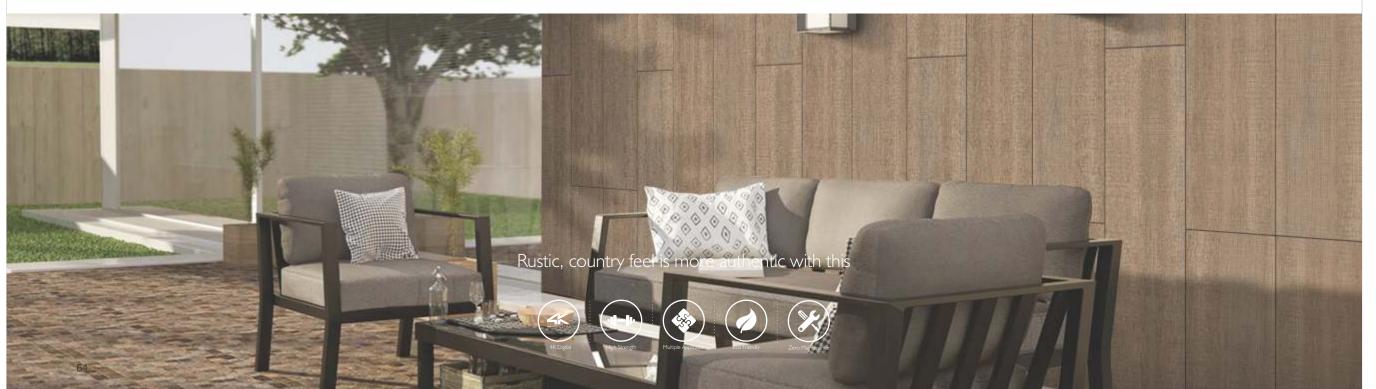



















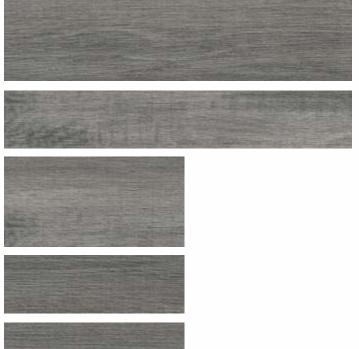



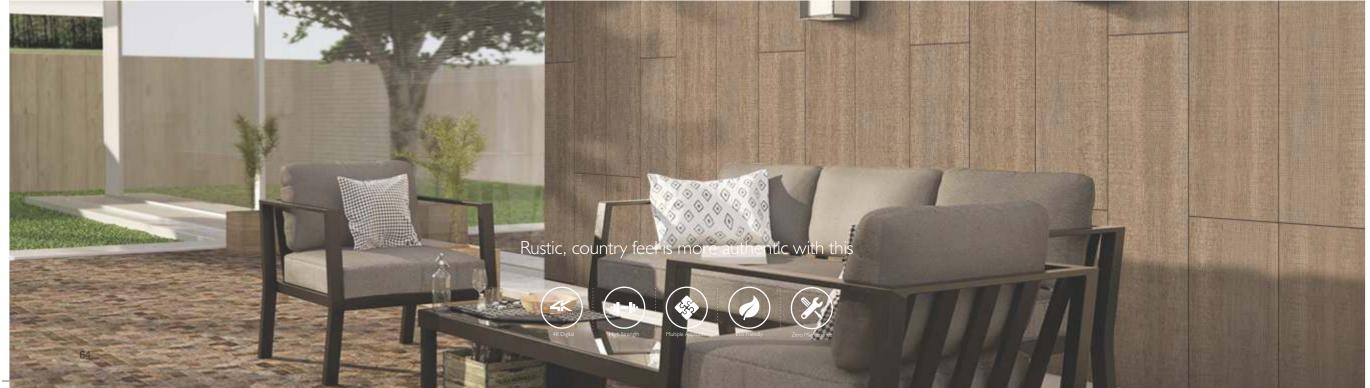





TECHNICAL SPECIFICATION OF SOL TILES

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP	MEAN VALUE OF SOL GVT	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	± 0.5 %	± 0.1 %	ISO-10545-2
Deviation in thickness	± 5.0 %	± 4.0 %	ISO-10545-2
Straightness in side	± 0.5 %	± 0.1%	ISO-10545-2
Rectangularity	± 0.5 %	± 0.1%	ISO-10545-2
Surface flatness	± 0.5 %	± 0.1 %	ISO-10545-2
Color difference	Unaltered	No change	ISO-10545-16
Glossiness	As per mfg	Min 90	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water absorption	≤ 0.50 %	≤ 0.50 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.0 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTI	ES		
Modulus of rupture	Min. 35 N/mm2	Min. 40 N/mm2	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTI	ES		
Surface Abrasion Resistance	As per mfg	Min. Class-4	ISO-10545-7
MOH's Hardness	As per mfg	Min. 5	EN 101
THERMO HYGROMETRIC PROPERT	IES		
Frost resistance	No damge		ISO-10545-12
Thermal shock resistance	No damge		ISO-10545-9
Moisture expansion	Nil		ISO-10545-10
Thermal expansion (COE)	Max. 9.0x10.6		ISO-10545-8
Crazing resistance	As per mfg		ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damge		ISO-10545-13
Stain resistance	Resistant		ISO-10545-14
SAFETY PROPERTIES			
Slip resistance	As per mfg		ISO-10545-17
Fire resistance	As per mfg		N.A

- . Plaster the surface of the floor where the tiles will be laid with smooth finish and complete the plastering and curing at least two weeks prior to laying.
- . Before fixing SOL tiles, lay them out in the desired pattern and make sure That they give an acceptable blend of colour. Please note that certain amount of shade variation is inherent in the manufacture of fully vitrified ceramic tiles. THE COMPANY WILL BEAR NO LIABILITY AFTER THE TILES ARE FIXED.
- The company bears no responsibility towords the tiles exposed to any outside process like transfers, printing, firing etc.
- I. For fixing SOL, we recommend the use of tile fixing adhesives for best results. Also follow the fixing instructions provided along with the adhesives.
- i. For fixing SOL tiles on the floor, using sand and cement, follow the instructions given


(a) use cement and sand mortar in the ratio of 1:4, Add some water to create a consistent paste.


(b) Once the mixing has completed do not add any further water and use the same within one hour.

(c) Apply a 20-30 mm, layer of bedding material over an area of 1 square meter at a time on the surface of the area. Apply a fine slurry to the back of the tile to ensure proper and full bedding. Press gently for even adherence at the back of the tile. DO NOT USE AN IRON HAMMER OR SOME HEAVY MATERIAL TO PRESS THE TILE.

- For fixing SOL tiles on Dado, we recommend the use of tile fixing adhesive with proper troweling method for 100 per cent coverage behind the tiles and for peerless bonding. Please follow the manufacturer's instructions for the same. We do not recommend the use of sand and cement for fixing on Dado.
- 7. Make and lay out the tiles from the center of the area to be laid so that cut tiles, if any, will be on the outer edges towards the walls.
- 3. The work size which we try to maintain for better technical performance is 600 x 600mm, 800 x 800mm, 600 x 1200mm on average. It is advisable to maintain a gap of 1 mm to 2 mm between every two tiles to allow for possible expansion as per BIS/EN tolerance norms.
- D. Complete the laying process by pressing the cut SOL tiles firmly into place along the
- . Allow 3-4 days for bed curing. After this period fill the joints with grouts. Usage of grout sealant is recommended for keeping the grout free of dust.
- . Fifteen minutes after finishing the grouting process, wipe off excess grout with a damp sponge and polish the tiles with a soft and dry cloth for a clean surface. The tiles can also be cleaned with a mild acid (However, Hydrofluoric acid and its derivatives should not be used).
- . Please note that the company does not accept any liability un case of problems arising out of non-adherence these fixing instructions.

Kindly look for the arrow (➤→) on the back of the tile and follow the laying pattern as shown in Pic-I:





MAINTENACE GUIDELINES FOR PGVT



STAINS (CREATED BY)	SOLVENTS (TURPENTINE, ACETONE TRICHLOROETHYLENE, ETC.)	SODIUM HYPO CHLORIDE (NaOCI)	ACIDS (HYDROCHLORIC ACID*)	ALKALI (SODIUM HYDROXIDE/ POTASSIUM HYDROXIDE)
BEVERAGES BEER				\checkmark
JUICES		✓		
COLA				√
COFFEE				✓
TEA	✓	✓		
INK BALL/FELT PEN	✓			
LIQUID INK	✓		✓	
MARKER INK	✓			
MISCELLANEOUS			✓	
CEMENT			V	
TAR	✓			
CALCAR			✓	
EDIBLE OIL	✓			
CIGARETTE			✓	
GLUE	✓			√
ICE CREAM				✓
PAINTS	✓		✓	
RESINS	✓			
RUST			✓	
BLOOD				✓

PACKING DETAILS

SR.NO	PRODUCT	NOMINAL SIZE BOX	THICKNESS	NO. OF TILES PER BOX	COVERAGE AREA
I	VITRIFIED TILES	1200X600MM	12 mm	2 PCS.	1.44 SQ. MTR.
2	VITRIFIED TILES	600X600MM	9 mm	4 PCS.	1.44 SQ. MTR.

PACKING DETAILS FOR WOODEN STRIPES

R.NO	PRODUCT	NOMINAL SIZE BOX	THICKNESS	NO. OF TILES PER BOX	COVERAGE AREA
ı	VITRIFIED TILES	1200X300MM	12 mm	4 Pcs. / 2 Pcs.	1.44 / 0.72 SQ. MTR.
2	VITRIFIED TILES	1200X200MM	12 mm	6 Pcs.	1.44 SQ. MTR.
3	VITRIFIED TILES	600X300MM	9 mm	8 Pcs. / 5 Pcs.	1.44 / 0.9 SQ. MTR.
4	VITRIFIED TILES	600X200MM	9 mm	8 Pcs.	0.96 SQ. MTR.
5	VITRIFIED TILES	600X150MM	9 mm	10 Pcs.	0.9 SQ. MTR.































NOTE: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective Customer are advised to inspect a sample of tiles before ordering, every effort has been made to ensure the accuracy of the information given. However, the Company research the right to change the specifications Without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advice you to follow the fixing Instruction on the cartons of the tiles as no responsibility can be accepted by the once the tiles have been fixed.

^{*}Commercial grade acid & solvents should not be used.





NETWORK

SOL is geared to make its presence felt everywhere. Be it on domestic front or on international markets, it is our aim to take the extraordinary range everywhere. With determined endeavors we are slowly but steadily making foray everywhere and expanding our reach. Currently, SOL is handling its nationwide and worldwide dealers and distributors network through offices in Ahmedabad, Gujarat and Dubai respectively. Best quality products with international appeal are our USP and we are poised to capture the export markets and hearts with it.

Contact Us

Business Development Manager (South India): +91 90999 72960

Zonal Manager (North East India): +91 99090 07530

Area Sales Manager (Kerala): +91 99617 36735

Regional Sales Manager (Upper North India): +91 70877 91369

Area Sales Manager (East India): +91 97485 16772

Regional Sales Manger (Eastern U.P.): +91 90990 01596


Area Sales Manager (Eastern U.P.): +91 90990 03406

Area Sales Manager (Eastern U.P.): +91 90990 04637

Area Sales Manager (Maharashtra - Vidarbha): +91 99617 36735

SPREADING LUXURY ACROSS THE WORLD



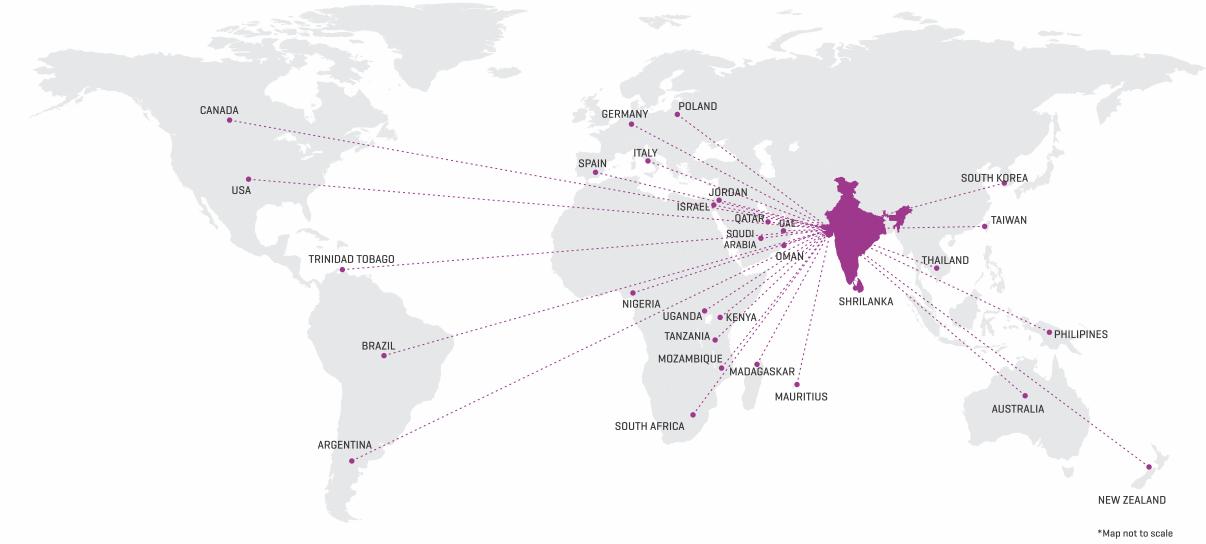

INTERNATIONAL OFFICES

Post Box #150742, Sharjah, The United Arab Emirates Ph.: +97150 2605897, 6560563 Email: vp.uae@soltiles.in, gm.uae@soltiles.in

246, Bevelly Drive, Queens Burry, HA 85NB, London, England. Ph.: +44-77609 99620

Email: uk@soltiles.in

AUSTRALIA

44, Claremount Avenue, Greenacre, NSW 2190, Australia. Ph.: +65-96707440

Email: aus@soltiles.in

KENYA

Off. Enterprise Road, Ind. Area, P.O. Box - 18583-00500, Kenya Ph.: +254 20 6651164 Email: kenya@soltiles.in

HONGKONG

17 D, 3 Victoria Tower, 188 Canton Roadm Tsimshatsui, Kowloom, Hongkong Email: hk@soltiles.in

SINGAPORE

Block No. 109, Lengkong Tiga, Singapore. Ph.: +65-96707440 Email: sg@soltiles.in

SOUTH AFRICA

Cramond Road, Campsbay, Cape Town, South Africa, 8005 Email: sa@soltiles.in